



## PACKMASTER LO-PRO II

AN IRIIDIUM SATELLITE-BASED TRACKING DEVICE WITH INTEGRAL PANIC BUTTON AND 2-WAY TEXT MESSAGING

### TRACKING

The reporting rate can be changed as required, from one minute intervals upwards. Waypoint marking and 'check-in' messages are also supported, all controlled through the LCD screen.


**THE PACKMASTER LO-PRO II CAN BE USED FOR BOTH PERSONAL AND VEHICLE TRACKING IN REMOTE REGIONS, ADDING A VITAL LAYER OF SECURITY.**

### FLEET MANAGEMENT

Two-way communication enables your business to coordinate logistics across Iridium satellite, giving you instant oversight of your fleet, globally.

### PANIC ALARM

Visual and audible notifications of the panic alarm are automatically forwarded by SMS and e-mail to nominated recipients.

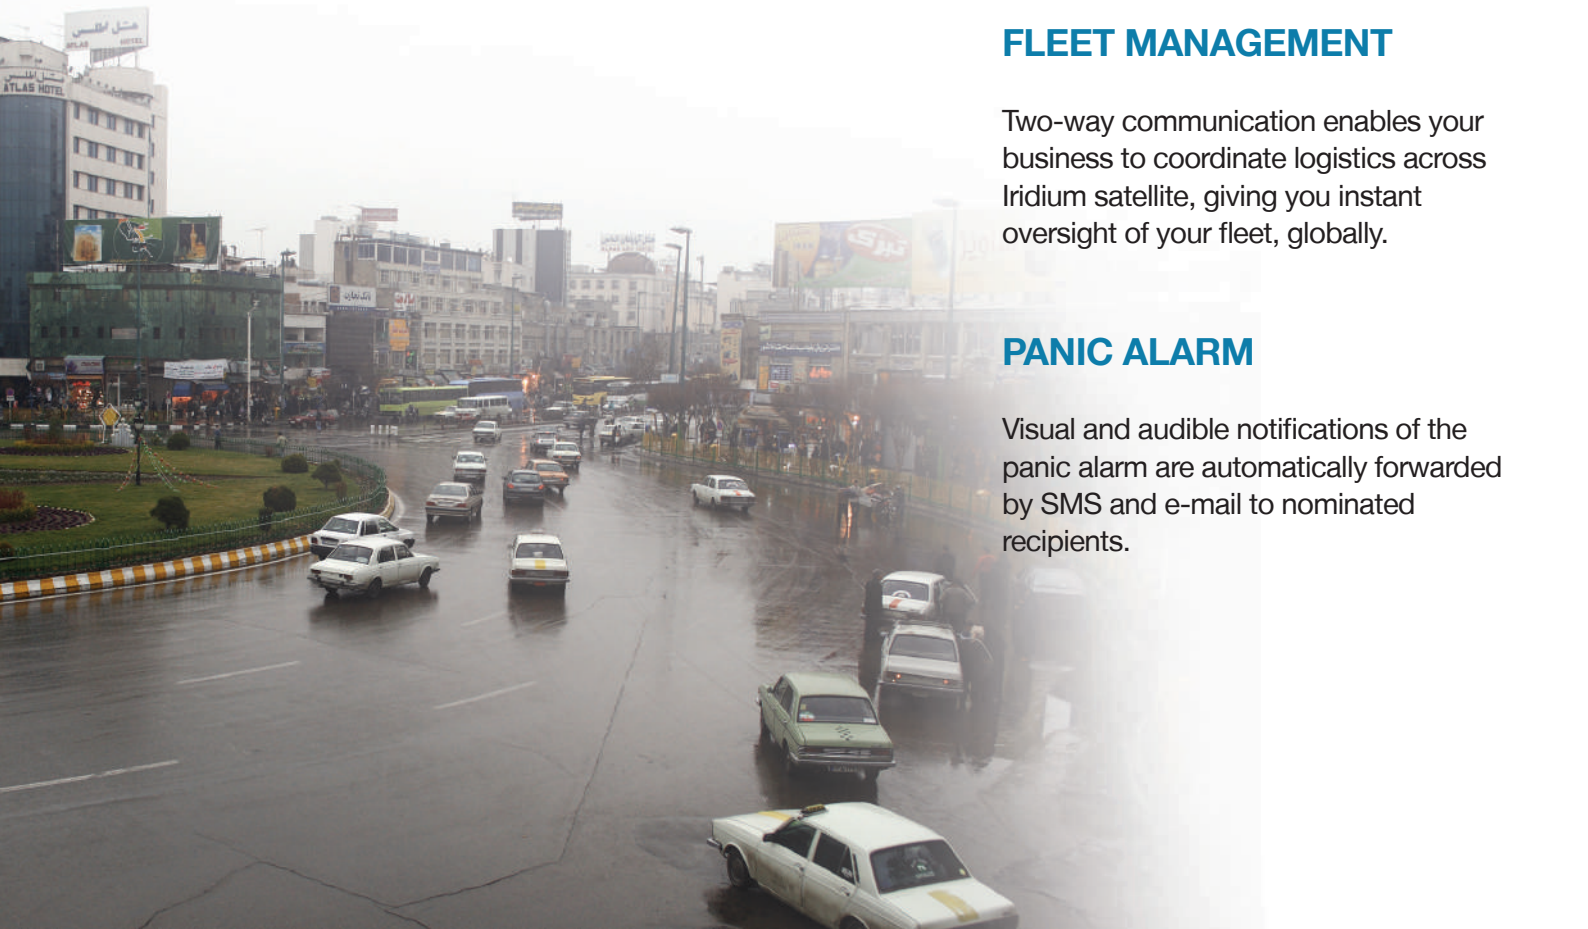

## EUROPE

+44 (0)20 7434 7305

## MIDDLE EAST

+971 (0)4 429 0576

sales@track24.com

www.track24.com



## MONITORING PLATFORM

The PackMaster Lo-Pro II is combined with Track24's monitoring and incident alert platform to enable organisations to view and communicate with their personnel and assets on a common operating picture.



## TEXT MESSAGING

The PackMaster Lo-Pro II provides 2-way text messaging between the device and the tracking platform. Free text and predefined canned messages are supported.

## SECURITY

With AES-256 bit encryption as standard, our PackMaster Lo-Pro II is robust and versatile and can be hand-carried or deployed as a vehicle tracker through the use of an optional vehicle kit.

## PACKMASTER LO-PRO II SPECIFICATIONS

Dimensions:	100mm x 56mm x 20 mm
Weight:	200g
Operating Temperature:	-20°C to +55°C BATTERY LIFE
Battery life:	4 days (at 15-minute position reporting). USB Interface (Used to charge battery).
Operating temperature range:	-40°F to +180°F (-40°C to +85°C)

## MONITORING PLATFORM

